



USB PC Adapter V4

Eglshalde 6
D-78647 Trossingen
Tel. +49 - (0) 74 25 / 228 - 0
Fax +49 - (0) 74 25 / 228 - 33
<http://www.tr-electronic.de>
Germany



- **Order No.:** 490-00310
- **Programmable PC adapter, conversion from USB to RS485**
- **Link between PC and programmable TR device**
- **Programming of the program specific protocols by means of the programming software TRWinProg**
- **Support of the protocols TRWinProg, EPROGW32 and LTprog**

General

The USB PC adapter V4 is used for communication between PC – USB interface and TR-devices with RS485 interface. The programming of the program-specific protocol occurs with the programming software “TRWinProg”.

The PC adapter is supported by the following PC programs:

- TRWinProg V3.42 or later, Soft-No.: 490-00416
- EPROGW32 V1.0.3.4 or later, Soft-No.: 490-00418
- LTprog, Soft-No.: 490-00415


At the installation first an **USB-Module** driver and then an **USB Serial Port** driver will be installed. The COM Port is created thereby as a virtual interface. The PC adapter is used PC-internally therefore like a normal COM interface.

System requirements

- IBM compatible PC
- DVD-ROM Drive
- One available USB interface
- Windows 98SE[®]/Me[®] or Windows NT 4[®] / 2000[®] / XP[®] / 7[®] 32bit

Pin assignment, 15-pin SUB-D

- 1.....RS-485 – (PT–)
- 2.....RS-485 + (PT+)
- 3 – 6.....N.C.
- 7.....internal connected to pin 14
- 8 – 13.....N.C.
- 14.....Supply Voltage +24 V DC
- 15.....Supply Voltage 0 V

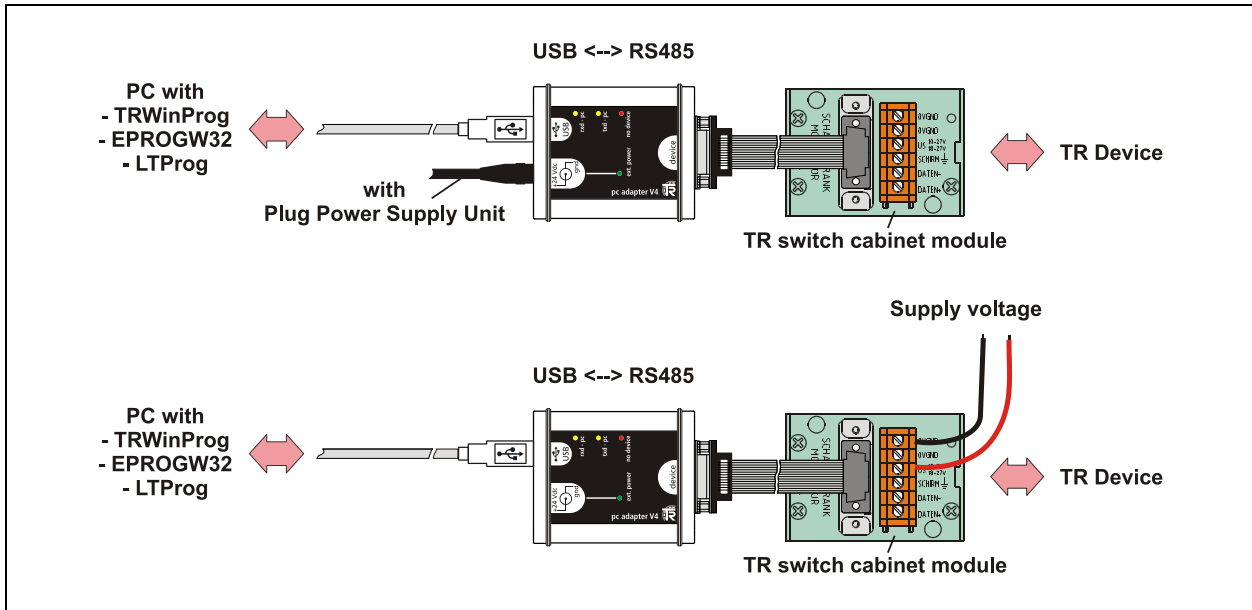Connection schematic

Dimension drawing
